



## Finite-time thermodynamic analysis for endoreversible Lenoir cycle coupled to constant-temperature heat reservoirs

Xun Shen<sup>1,2,3</sup>, Linggen Chen<sup>1,2,3</sup>, Yanlin Ge<sup>1,2,3</sup>, Fengrui Sun<sup>1,2,3</sup>

<sup>1</sup> Institute of Thermal Science and Power Engineering, Naval University of Engineering, Wuhan 430033, China.

<sup>2</sup> Military Key Laboratory for Naval Ship Power Engineering, Naval University of Engineering, Wuhan 430033, China.

<sup>3</sup> College of Power Engineering, Naval University of Engineering, Wuhan 430033, China.

Received 2 Sep. 2016; Received in revised form 22 Nov. 2016; Accepted 12 Dec. 2016; Available online 1 May 2017

### Abstract

A thermodynamic model of a steady-flow endoreversible Lenoir heat engine cycle (a “three point” cycle) coupled to constant-temperature heat reservoirs is established in this paper by using finite time thermodynamic theory. The cycle consists of one isochoric heating branch, one adiabatic expansion branch and one isobaric cooling branch. The analytical formulae about power output and thermal efficiency of the cycle are derived. The optimal performance of the cycle is obtained with the fixed total thermal conductance of heat exchangers. Moreover, the effects of the heat reservoir temperature ratio and the total thermal conductance of heat exchangers on the general and optimal performances are analyzed. The results show that the power and efficiency performance curve of the cycle is a fixed “point” with constant thermal conductance of hot- and cold-side heat exchangers, and there exist optimal thermal conductance distributions, which lead to maximum power and maximum efficiency, respectively, with changeable thermal conductances of hot- and cold-side heat exchangers. Both the power and efficiency will be enhanced with the increase of thermal conductance ratio between high- and low-temperature heat reservoirs, or the total thermal conductance of heat exchangers.

*Copyright © 2017 International Energy and Environment Foundation - All rights reserved.*

**Keywords:** Finite time thermodynamics; Endoreversible Lenoir heat engine cycle; Power and efficiency characteristics.

### 1. Introduction

Since the analysis and optimization of various heat engine cycles for various objectives have been made by using the finite time thermodynamics theory [1-10], it has made tremendous progress in different periods. The endoreversible model for heat engine cycles, which is originally used by Novikov [11], Chambadal [12], Curzon and Ahlborn [1], is the basic model of finite time thermodynamics. Sun et al. [13] and Chen et al. [14] derived the fundamental optimal formulae of power and efficiency for endoreversible Carnot heat engine with the fixed total heat-transfer area of heat exchangers, and made some performance optimizations. Chen et al. [15, 16] investigated performances of steady-flow

thermodynamic cycles coupled to constant- and variable-temperature heat reservoirs, derived the optimum performance characteristics of endoreversible Carnot and Brayton heat engines with fixed total thermal conductance of heat exchangers, obtained the optimum power output and the thermal efficiency limit, and made a comparison between the two cycles. Zhang et al. [17] established a relatively universal endoreversible steady-flow heat engine cycle model, which consists of two adiabatic branches, two constant thermal-capacity heating branches and a constant thermal-capacity cooling branch, and studied power, efficiency and their optimal relationship, and the exergy-based ecological performance. Yang et al. [18] built an endoreversible model of an intercooled regenerated Brayton heat and power cogeneration plant coupled to variable-temperature heat reservoirs, and optimized the heat conductance distributions and the choice of intercooling pressure ratio on the basis of the exergetic analysis.

Early in the 1860, Lenoir developed an atmospherically compressive engine, the progenitor of the Otto one. The Lenoir cycle is based on the engine [19]. By using the classical thermodynamic method, Georgiou [20] made some analysis on the formulae of thermal efficiency, temperature ratio and adiabatic coefficient for the simple Lenoir cycle, the version with straightforward regenerative preheating process, and the modified (double) Lenoir cycle with regenerative preheating, and compared the thermal efficiency with Carnot's. On the basis of Ref. [20], the focus of this paper is to study power output and thermal efficiency characteristics of endoreversible Lenoir heat engine cycle with heat-transfer loss, and optimize the heat conductance distribution by using finite time thermodynamics.

## 2. Cycle model

The model of endoreversible Lenoir heat engine cycle coupled to constant-temperature heat reservoirs  $T_H$  and  $T_L$  is shown in Figure 1 (a) and (b). The "three point" cycle consists of three processes. The heating process is isochoric 1–2. The expansion process is adiabatic 2-3. The cooling process is isobaric 3–1. It is assumed that the working fluid is an ideal gas.

According to the law of heat transfer, properties of working fluid and the theory of heat exchangers [21, 22], the rate of heat transfer ( $Q_H$ ) supplied by the heat source, and the rate of heat transfer ( $Q_L$ ) released to the heat sink are, respectively

$$\begin{aligned} Q_H &= U_H(T_2 - T_1) / \ln[(T_H - T_1)/(T_H - T_2)] \\ &= \dot{m}C_V(T_2 - T_1) = \dot{m}C_V E_H(T_H - T_1) \end{aligned} \quad (1)$$

$$\begin{aligned} Q_L &= U_L(T_1 - T_3) / \ln[(T_1 - T_L)/(T_3 - T_L)] \\ &= \dot{m}C_P(T_3 - T_1) = \dot{m}C_P E_L(T_3 - T_L) \end{aligned} \quad (2)$$

where  $\dot{m}$  is mass flow rate of the working fluid,  $E_H$  and  $E_L$  are the effectivenesses of the hot- and cold-side heat exchangers. The relationships of the effectivenesses ( $E_H$  and  $E_L$ ), the numbers of heat transfer units ( $N_H$  and  $N_L$ ), and the heat conductance ( $U_H$  and  $U_L$ ) of the hot- and cold-side heat exchangers are as following:

$$E_H = 1 - \exp(-N_H), E_L = 1 - \exp(-N_L) \quad (3)$$

$$N_H = U_H / (\dot{m}c_V), N_L = U_L / (\dot{m}c_P) \quad (4)$$

and the heat conductance ( $U_H$  and  $U_L$ ) is the product of heat-transfer coefficient  $\alpha$  and heat transfer surface area  $F$ , that is,  $U_H = \alpha_H F_H$  and  $U_L = \alpha_L F_L$ .

Within an endoreversible cycle, according to the second law of thermodynamics, the working fluid obeys:

$$\Delta s = c_V \ln(T_2/T_1) - c_P \ln(T_3/T_1) = 0 \quad (5)$$

## 3. Performance analysis

According to properties of ideal working fluid, Eq. (5) can be rearranged as:

$$T_2 / T_1 = (T_3 / T_1)^k \quad (6)$$

The power output and the thermal efficiency of the cycle are:

$$P = Q_H - Q_L \quad (7)$$

$$\eta = 1 - Q_L / Q_H \quad (8)$$

Eqs. (1) and (2) give the relations among the temperatures of three state points:

$$T_2 = E_H T_H + (1 - E_H) T_1 \quad (9)$$

$$T_3 = \frac{(T_1 - E_L T_L)}{(1 - E_L)} \quad (10)$$

Combining Eqs. (1), (2), (9) and (10) gives:

$$Q_H = \dot{m} c_v E_H (T_H - T_1) \quad (11)$$

$$Q_L = \frac{\dot{m} k c_v E_L (T_1 - T_L)}{(1 - E_L)} \quad (12)$$

Combining Eqs. (7), (8), (11) and (12) gives power output and the thermal efficiency as follows:

$$P = \dot{m} c_v \left[ \left( E_H T_H + \frac{k E_L T_L}{1 - E_L} \right) - \left( E_H + \frac{k E_L}{1 - E_L} \right) T_1 \right] \quad (13)$$

$$\eta = \left( \frac{T_H}{(T_H - T_1)} + \frac{k E_L T_L}{E_H (1 - E_L) (T_H - T_1)} \right) - \left( \frac{1}{(T_H - T_1)} + \frac{k E_L}{E_H (1 - E_L) (T_H - T_1)} \right) T_1 \quad (14)$$

Combining Eqs. (6), (9) and (10) gives what the temperature  $T_1$  obeys:

$$T_1 - E_L T_L = (1 - E_L) [E_H T_H + (1 - E_H) T_1]^{\frac{1}{k}} T_1^{1 - \frac{1}{k}} \quad (15)$$

The value of  $T_1$  can be obtained by numerical calculation method from Eq. (15). Substituting  $T_1$  into Eqs. (9) and (10), one can obtain the value of  $T_2$  and  $T_3$ . Substituting  $T_1$  into Eqs. (13) and (14), one can obtain the power output and the thermal efficiency of the endoreversible Lenoir cycle.

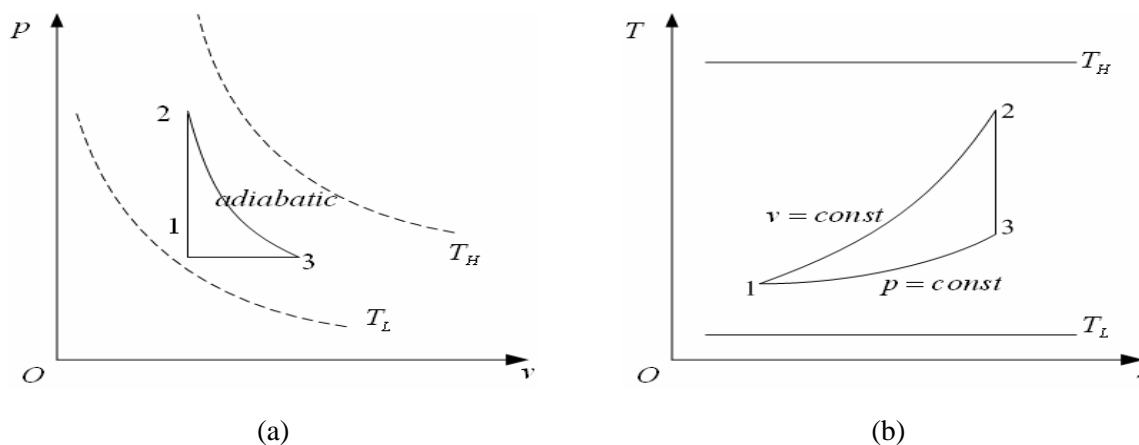


Figure 1. p-v and T-s diagrams for endoreversible Lenoir heat engine cycle model.

## 4. Discussion

### 4.1 Performance with constant thermal conductance of hot- and cold-side heat exchangers

When the thermal conductances of hot- and cold-side heat exchangers ( $U_H$  and  $U_L$ ) are fixed as constants, the effectivenesses ( $E_H$  and  $E_L$ ) are constants, too. Coupled to constant-temperature heat reservoirs  $T_H$  and  $T_L$ , Eqs. (13)-(15) give both the power output and the thermal efficiency of the endoreversible Lenoir cycle to be also constants. That is, the  $T-s$  curve of the cycle is completely fixed, and the  $P-\eta$  curve of the cycle is a fixed “point”.

This makes performance of the endoreversible Lenoir cycle very different from those of other typical endoreversible heat engine cycles studied before, such as endoreversible Carnot [5-10], Diesel [23], Otto [24], Atkinson [25], Brayton [26], Dual [27], Stirling [28] and Miller [29] cycles, as well as some universal heat engine cycle models [30-34]. The  $P-\eta$  characteristic curve of the endoreversible Lenoir cycle is a fixed “point”, while the characteristic curves of the other endoreversible cycles are almost all parabolic-like ones. Making some comparisons between them, one can see that, as there is no (adiabatic) compression process in the Lenoir cycle, the thermal efficiency loses the variability dimension adapted to the temperature or ratio of pressure of state points. Therefore, there does not exist the fundamental optimal formulae of power and thermal efficiency for the cycle, and when the thermal conductances of hot- and cold-side heat exchangers ( $U_H$  and  $U_L$ ) are fixed as constants, the state of each point is fixed.

### 4.2 Performance with variable thermal conductances of hot- and cold-side heat exchangers

When the thermal conductances of hot- and cold-side heat exchangers ( $U_H$  and  $U_L$ ) are changeable, the heat conductance distribution can be optimized with a fixed total thermal conductance of heat exchangers. The optimum power output or the optimum thermal efficiency will be obtained. For a fixed total thermal conductance  $U_T$ , one can define:

$$U_L + U_H = U_T \quad (16)$$

and set  $u_L = U_L/U_T$  ( $0 < u_L < 1$ ). Combining it with Eqs. (3) and (4) gives the effectivenesses ( $E_H$  and  $E_L$ ):

$$E_H = 1 - \exp\left(-\frac{(1-u_L)U_T}{\dot{m}c_v}\right), E_L = 1 - \exp\left(-\frac{u_L U_T}{\dot{m}k c_v}\right) \quad (17)$$

From Eqs. (13)-(17), one can obtain the characteristics of power output and the thermal efficiency versus thermal conductance distribution, and the optimal thermal conductance distribution of the endoreversible Lenoir cycle.

## 5. Numerical examples

Numerical examples are provided to illustrate the preceding analyses. According to Ref. [17], take the working fluid as ideal gas, and it is set that:  $T_L = 320\text{K}$ ,  $\dot{m} = 1.1165\text{kg/s}$ ,  $C_v = 0.7165\text{kJ}/(\text{kg}\cdot\text{K})$ , and  $k = 1.4$ .

When the thermal conductances of hot- and cold-side heat exchangers ( $U_H$  and  $U_L$ ) are fixed as constants, the effectivenesses ( $E_H$  and  $E_L$ ) are constants, and set them as  $E_H = E_L = 0.8$  or  $0.9$ . The power output and the thermal efficiency of endoreversible Lenoir cycle can be obtained by using numerical calculation method.

When the thermal conductances of hot- and cold-side heat exchangers ( $U_H$  and  $U_L$ ) are changeable, the values of total thermal conductance are set as  $U_T = 2.5\text{kW/K}$ ,  $5\text{kW/K}$ ,  $7.5\text{kW/K}$  and  $10\text{kW/K}$ . Take the thermal conductance distribution ( $u_L$ ) as a variable, one can obtain power and efficiency versus thermal conductance distribution by using numerical calculation method, and analyze the effects of design parameters on the performance.

Figure 2 shows power output and the thermal efficiency of endoreversible Lenoir cycle when the thermal conductances of hot- and cold-side heat exchangers ( $U_H$  and  $U_L$ ) are fixed as constants. In that condition, the power output and the thermal efficiency of the cycle are completely fixed, that means, the

$P-\eta$  characteristic curve of the cycle is a fixed “point”. It is the distinct characteristic which makes Lenoir cycle differ from the other cycles. Both the power output and the thermal efficiency will increase with the increase of the temperature ratio between heat source and heat sink, or the effectivenesses ( $E_H$  and  $E_L$ ) of heat exchangers.

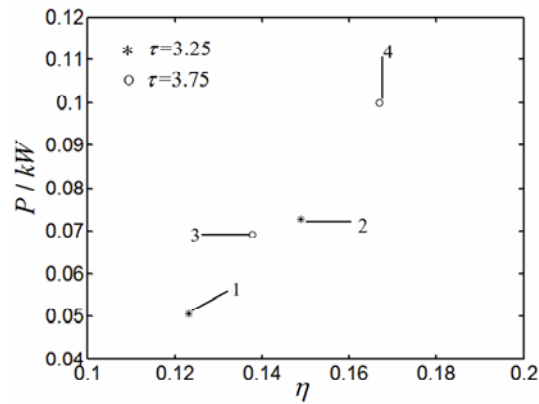


Figure 2. Power and efficiency of endoreversible Lenoir cycle with constant thermal conductance; (1)  $\tau=3.25$ ,  $E_H = E_L = 0.8$ ; (2)  $\tau=3.25$ ,  $E_H = E_L = 0.9$ ; (3)  $\tau=3.75$ ,  $E_H = E_L = 0.8$ ; (4)  $\tau=3.75$ ,  $E_H = E_L = 0.9$ .

Figure 3 shows the characteristic of power output ( $P$ ) versus thermal conductance distribution ( $u_L$ ) of endoreversible Lenoir cycle, and the effects of the temperature ratio ( $\tau$ ) and the total thermal conductance ( $U_T$ ) on the characteristic. One can see that taking heat-transfer loss into consideration, the  $P-u_L$  characteristic curve is parabolic-like one, and there exists an optimal thermal conductance distribution ( $u_{LP}$ ) leading to the maximum power output ( $P_m$ ). The power output ( $P$ ) will increase with the increase of the temperature ratio ( $\tau$ ) between heat source and heat sink, or the total thermal conductance ( $U_T$ ). But the optimal thermal conductance distribution ( $u_{LP}$ ) will decrease with the increase of the total thermal conductance ( $U_T$ ). To a certain range the total thermal conductance ( $U_T$ ) increases, the maximum power output ( $P_m$ ) will not increase obviously. Moreover, the neighborhood of the thermal conductance distribution ( $u_{LP} - \Delta u$ ,  $u_{LP} + \Delta u$ ) that makes the power output ( $P$ ) approach very near the maximum ( $P_m$ ) extends. From the perspective of engineering, when the total thermal conductance ( $U_T$ ) increases to that range, one can obtain the maximum power output ( $P_m$ ) even thermal conductance distribution ( $u_L$ ) depart the optimal one ( $u_{LP}$ ) in some extent.

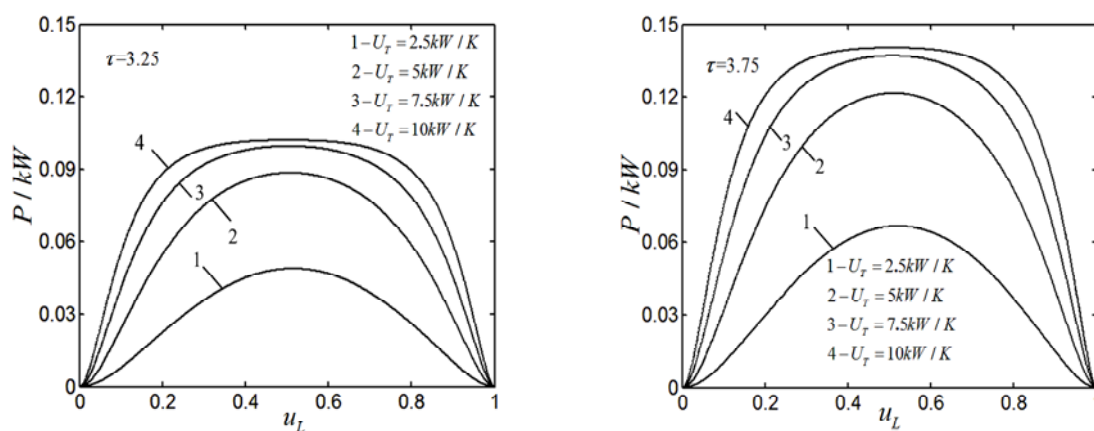


Figure 3. Power versus thermal conductance distribution of endoreversible Lenoir cycle.

Figure 4 shows the characteristic of thermal efficiency ( $\eta$ ) versus thermal conductance distribution ( $u_L$ ) of endoreversible Lenoir cycle, and the effects of the temperature ratio ( $\tau$ ) and the total thermal

conductance ( $U_T$ ) on the characteristic. One can see that there exists an optimal thermal conductance distribution ( $u_{L\eta}$ ) leading to the maximum thermal efficiency ( $\eta_m$ ). The  $\eta-u_L$  characteristic curve is also parabolic-like one, and the effects of  $\tau$  and  $U_T$  on the  $\eta-u_L$  characteristic are similar to those on  $P-u_L$  characteristic.

Table 1 lists the optimal thermal conductance distributions ( $u_{LP}$  for  $P_m$  and  $u_{L\eta}$  for  $\eta_m$ ) of the cycle with different heat reservoir temperature ratios ( $\tau$ ) and total thermal conductances ( $U_T$ ). One can find that for the fixed heat reservoir temperature ratio ( $\tau$ ) and total thermal conductance ( $U_T$ ), the optimal thermal conductance distributions obey  $u_{LP} < u_{L\eta}$  rule, namely, the optimal thermal conductance distribution for maximum power output ( $P_m$ ) differs from that for ( $\eta_m$ ), the former is less than the latter one.

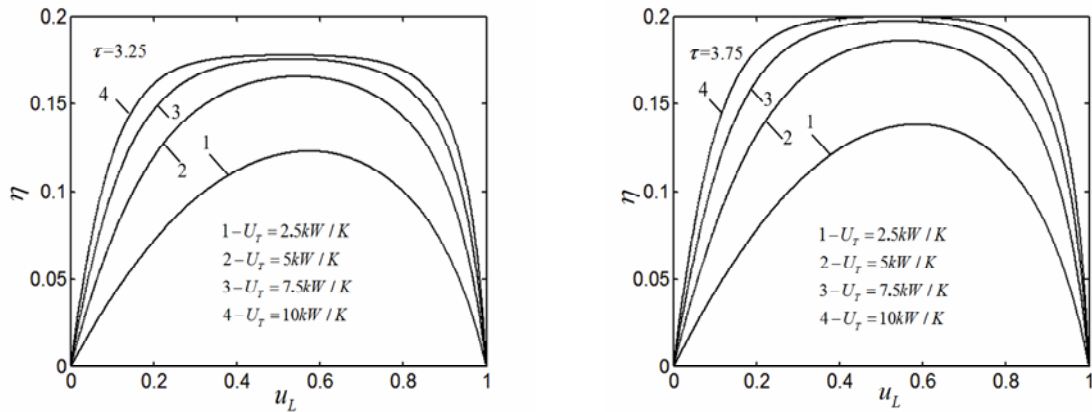


Figure 4. Efficiency versus thermal conductance distribution of endoreversible Lenoir cycle.

Table 1. Optimal thermal conductance distributions of the cycle with different heat reservoir temperature ratio and total thermal conductance.

$U_T / (\text{kW} / \text{K})$		2.5	5	7.5	10
$\tau = 3.25$	$u_{LP}$	0.515	0.507	0.504	0.503
	$u_{L\eta}$	0.574	0.548	0.534	0.526
$\tau = 3.75$	$u_{LP}$	0.521	0.511	0.507	0.505
	$u_{L\eta}$	0.587	0.557	0.540	0.530

**6. Conclusion**

Based on the finite time thermodynamic theory, this paper establishes a thermodynamic model of a steady-flow endoreversible Lenoir heat engine cycle (a “three point” cycle) coupled to constant-temperature heat reservoirs, derives the formulae about power and thermal efficiency of the cycle, and obtains the optimal performance of the cycle with the fixed total thermal conductance of heat exchangers. The characteristic of power output versus thermal conductance distribution and that of thermal efficiency versus thermal conductance distribution are obtained using numerical examples. The results obtained herein show that there exist optimal thermal conductance distributions, which lead to maximum power and maximum efficiency ( $u_{LP}$  for  $P_m$  and  $u_{L\eta}$  for  $\eta_m$ ), respectively, with variable thermal conductance of hot- and cold-side heat exchangers. Moreover, both the heat reservoir temperature ratio and the total thermal conductance have obvious effects on the characteristics of cycle. The model, method and results can provide some theoretical guidelines for the improvement of practical performance of Lenoir heat engine.

**Acknowledgments**

This paper is supported by The National Natural Science Foundation of P. R. China (Project No. 51576207).

**Nomenclature**

$c$	specific heat (kJ/(kg·K))	$\eta$	thermal efficiency
$E$	effectiveness of the heat exchanger	$\tau$	temperature ratio
$F$	heat transfer surface area (m <sup>2</sup> )	<i>Subscripts</i>	
$k$	ratio of the specific heats	$H$	high temperature side
$\dot{m}$	mass flow rate (kg/s)	$L$	low temperature side
$P$	pressure (kPa); power (kW)	$LP$	maximum power output
$Q$	heat flow rate (kJ/s)	$L\eta$	maximum thermal efficiency
$s$	specific entropy (kJ/(kg·K))	$m$	maximum
$T$	temperature (K)	$P$	pressure
$u$	thermal conductance distribution	$V$	volume
<i>Greek symbols</i>		$1-3$	state point/sequence number
$\alpha$	heat-transfer coefficient		

**References**

- [1] Curzon F L, Ahlborn B. Efficiency of a Carnot engine at maximum power output. *Am. J. Phys.*, 1975, 43(1): 22-24.
- [2] Andresen B. *Finite-Time Thermodynamics*, Physics Laboratory II, Univ. of Copenhagen, 1983.
- [3] Bejan A. Entropy generation on minimization: The new thermodynamics of finite-size device and finite-time processes. *J. Appl. Phys.*, 1996, 79(3): 1191-1218.
- [4] Berry R S, Kazakov V A, Sieniutycz S, Szwasz Z, Tsirlin A M. *Thermodynamic Optimization of Finite Time Processes*. Wiley, Chichester, 1999.
- [5] Chen L, Wu C, Sun F. Finite time thermodynamic optimization or entropy generation minimization of energy systems. *J. Non-Equilib. Thermodyn.*, 1999, 24(4): 327-359.
- [6] Chen L, Sun F. *Advances in Finite Time Thermodynamics: Analysis and optimization*. New York: Nova Science Publishers, 2004.
- [7] Chen L. *Finite Time Thermodynamic Analysis of Irreversible Processes and Cycles*. Higher Education Press, Beijing, 2005 (in Chinese).
- [8] Sieniutycz S, Jezowski J. *Energy Optimization in Process Systems*. Oxford, UK: Elsevier, 2009.
- [9] Andresen B. Current trends in finite-time thermodynamics. *Angewandte Chemie International Edition*, 2011, 50(12): 2690-2704.
- [10] Feidt M. Thermodynamics of energy systems and processes: A review and perspectives. *J. Appl. Fluid Mech.*, 2012, 5(2): 85-98.
- [11] Novikov II. The efficiency of atomic power stations (A review). *Atomnaya Energiya* 3, 1957(11): 409.
- [12] Chambdal P. *Les Centrales Nucleases*. Paris: Armand Colin, 1957(11): 41-58.
- [13] Sun F, Chen L, Chen W. Finite time thermodynamics analysis and evaluation for a heat engine with steady-state energy conversion between heat source. *J. Eng. Therm. Energy and Power*, 1989, 4(2): 1-6. (in Chinese)
- [14] Chen W, Sun F, Chen L. Area performance of a heat engine between heat reservoirs under stable energy transfer. *J. Eng. Thermophys.*, 1990, 11(4): 365-368(in Chinese).
- [15] Chen L, Ni N, Sun F. Comparison in performances of Brayton and Carnot thermal engine cycles. I. Steady flow cycles with infinite reservoirs. *J. Propul. Tech.*, 1997, 18(4): 18-21(in Chinese).
- [16] Chen L, Zhu Z, Cao Y, Sun F. Comparison in performances of Brayton and Carnot thermal engine cycles [J]. II. Steady flow cycles with finite reservoirs. *J. Propul. Tech.*, 1997, 18(5):57-61(in Chinese).
- [17] Zhang W, Chen L, Sun F, Wu C. Exergy-based ecological optimal performance for a universal endoreversible thermodynamic cycle. *Int. J. Ambient Energy*, 2007, 28(1): 51-56.
- [18] Yang B, Chen L, Ge Y, Sun F. Exergy performance analyses of an irreversible two-stage intercooled regenerative reheated closed Brayton CHP plant. *Int. J. Exergy*, 2014, 14(4): 459-483.
- [19] Lichty C. *Combustion Engine Processes*. New York: McGraw-Hill, 1967.
- [20] Georgiou D P. Useful work and the thermal efficiency in the ideal Lenoir with regenerative preheating. *J. Appl. Phys.*, 2008, 88(10): 5981-5986.
- [21] Incropera F P, DeWitt D P. *Fundamentals of Heat and Mass Transfer*, Wiley, New York, 1985.
- [22] Janna W S. *Engineering Heat Transfer*, CRC Press, Boca Raton, 2000.
- [23] Chen L, Zeng F, Sun F, Wu C. Heat transfer effect on net work and/or power as function of efficiency for air-standard Diesel cycles. *Energy, The Int. Journal*, 1996, 21(12): 1201-1205.
- [24] Chen L, Wu C, Sun F, Chao S. Heat transfer effects on the net work output vs. efficiency characteristics for an air-standard Otto cycle. *Energy Conv. and Manag.*, 1998, 39(7): 643-648.

- [25] Ge Y, Chen L, Sun F, Wu C. Performance of an endoreversible Atkinson cycle. *Journal of Energy Institute*, 2007, 80(1): 52-54.
- [26] Chen L, Zheng J, Sun F, Wu C. Performance comparison of an endoreversible closed variable-temperature heat reservoir Brayton cycle under maximum power density and maximum power conditions. *Energy Conversion and Management*, 2002, 43(1): 33-43.
- [27] Lin J, Chen L, Wu C, Sun F. Finite-time thermodynamic performance of Dual cycle. *International Journal of Energy Research*, 1999, 23(9): 765-772.
- [28] Wu F, Chen L, Sun F, Wu C. Finite-time exergoeconomic performance bound for a quantum Stirling engine. *International Journal of Engineering Science*, 2000, 38(2): 239-247.
- [29] Ge Y, Chen L, Sun F, Wu C. Effects of heat transfer and variable specific heats of working fluid on performance of a Miller cycle. *Int. Journal of Ambient Energy*, 2005, 26(4): 203-214.
- [30] Qin X, Chen L, Sun F, Wu C. The universal power and efficiency characteristics for irreversible reciprocating heat engine cycles. *European Journal of Physics*, 2003, 24(4): 359-366.
- [31] Zheng Z, Chen L, Sun F, Wu C. Maximum profit performance for a class of universal steady flow endoreversible heat engine cycles. *International Journal of Ambient Energy*, 2006, 27(1): 29-36.
- [32] Zhang W, Chen L, Sun F, Wu C. Exergy-based ecological optimal performance for a universal endoreversible thermodynamic cycle. *Int. Journal of Ambient Energy*, 2007, 28(1): 51-56.
- [33] Chen L, Zhang W, Sun F. Power, efficiency, entropy generation rate and ecological optimization for a class of generalized irreversible universal heat engine cycles. *Applied Energy*, 2007, 84(5): 512-525.
- [34] Chen L, Ge Y, Sun F. Unified thermodynamic description and optimization for a class of irreversible reciprocating heat engine cycles. *Proceedings IMechE, Part D: Journal of Automobile Engineering*, 2008, 222(D8): 1489-1500.



**Xun Shen** received his BS Degrees in 2011 in engineering mechanics and aerospace engineering from the Tsinghua University, P R China. His work covers topics in finite time thermodynamics and technology support for propulsion plants. BS Shen is the author or co-author of over 10 peer-refereed articles (3 in English).




**Linggen Chen** received all his degrees (BS, 1983; MS, 1986, PhD, 1998) in power engineering and engineering thermophysics from the Naval University of Engineering, P R China. His work covers a diversity of topics in engineering thermodynamics, constructal theory, turbomachinery, reliability engineering, and technology support for propulsion plants. He had been the Director of the Department of Nuclear Energy Science and Engineering, the Superintendent of the Postgraduate School, and the Dean of the College of Naval Architecture and Power. Now, he is the Direct, Institute of Thermal Science and Power Engineering, the Director, Military Key Laboratory for Naval Ship Power Engineering, the Direct of the National Experimental Teaching Demonstration Center for Naval Ship Power Engineering, and the Dean of the College of Power Engineering, Naval University of Engineering, P R China. Professor Chen is the author or co-author of over 1570 peer-refereed articles (over 685 in English journals and 55 in international conferences) and 12 books (two in English).

E-mail address: lgchenna@yahoo.com; linggenchen@hotmail.com, Fax: 0086-27-83638709 Tel: 0086-27-83615046



**Yanlin Ge** received all his degrees (BS, 2002; MS, 2005, PhD, 2011) in power engineering and engineering thermophysics from the Naval University of Engineering, P R China. His work covers topics in finite time thermodynamics and technology support for propulsion plants. Associate Professor Ge is the author or coauthor of over 150 peer-refereed articles (over 65 in English journals).



**Fengrui Sun** received his BS Degrees in 1958 in Power Engineering from the Harbing University of Technology, P R China. His work covers a diversity of topics in engineering thermodynamics, constructal theory, reliability engineering, and marine nuclear reactor engineering. He is a Professor in the College of Power Engineering, Naval University of Engineering, P R China. Professor Sun is the author or co-author of over 1400 peer-refereed papers (over 635 in English) and two books (1 in English).